

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEV, A.B.

Interpretation of quantum mechanics. Pt. 4. Godishnik fiz mat
55 no.2:55-88 '60/'61 [publ. '62].

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATSEV, FEDOR N.

24

5

Quantum interpretation of certain results of classical mechanics. Anatole Dordev. *J. Phys. (U. S. S. R.)* 4, 209-76(1941)(in French).—Theoretical-math. The motion of 3 material particles A_1, A_2 and A_3, A_4 with charge $-e, +e, +e$, in a plane is called, to a second approximation by perturbation methods and found to yield a semblance to Bohr's hydrogen atom. A study of the Jacobi function S shows that S becomes modified to represent a wave attached to a material corpuscle. P. H. R.

A.S.G.-SEA METALLURGICAL LITERATURE CLASSIFICATION

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

Datzaïf, A. Sur le problème de la propagation des ondes.
Phys. Math.

introduction deux méthodes sont formellement équivalentes:
la méthode de la transformation de Green plane incidente/ondée
et la méthode de la transformation de Green plane incidente/ondée
peut être étendue à l'analyse des problèmes non statiques et non linéaires
pour le problème non statique et se prête à généralisation
au cas de deux ou trois variables indépendantes.
From the author's summary.

Source: Mathematical Reviews.


Vol. 22 No. 4

Datzeff, A. Sur le refroidissement d'un corps non homo-

Source: Mathematical Review [o] 13 No. 4

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

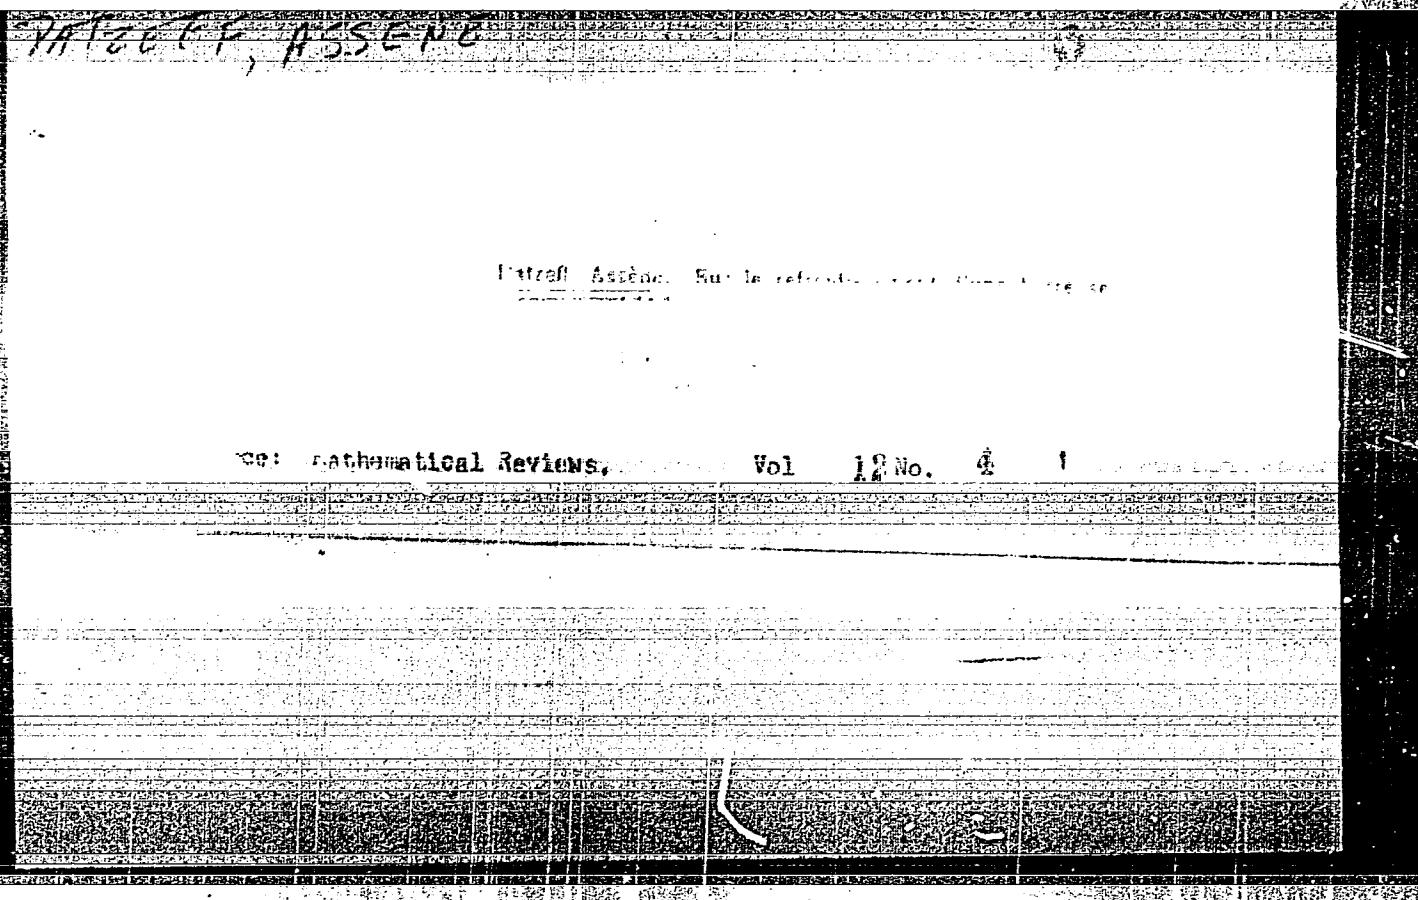

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATSEV, A.

~~SURNAME (in capa); Given Names~~

Country: Bulgaria

Academic Degrees: Academician

Affiliation: Member of the staff of Priroda

Source: Sofia, Priroda, No 1, Jan/Feb 61, pp 106-107

Data: "The 1960 Humboldt Festival in Berlin."

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEV, AS
A B

Watson, Asstne. Sub + refurbishment. 3 Jan 1983 1000
Sergeant
111 114 1947 4
In preparation the following is the command to be given
to the unit.

The problem was identified and corrected by the following:
AC 03 47 1000

Initial Inspection Review:

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DAYSEY, J. S.

1943 Aisen On the cooling of a hot impurity
in the ends of finite length

Mathematical Reviews, 1943, Vol 9, No. 2

SJM
out

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATSEV, Asen

*Dacev, Asen. On the cooling of bars composed of a finite
number of inhomogeneous parts.*
Bulgarian Academy of Sciences, 1948, No. 1.

On the cooling of bars composed of a finite number of inhomogeneous parts.

(a)

$$u_1(x, 0) = \psi_1(x), \quad x_1 < x < x_2$$

(b)

$$u_1(x_1, t) = \phi_1(t), \quad u_2(x_2, t) = \phi_2(t), \quad t \geq 0,$$

(c)

$$u_t = k_{11} u_{xx}, \quad x = x_1, t > 0$$

(d)

$$k_{11} \partial u_{xx} / \partial x = k_{12} u_{x1} / \partial x$$

Denote $u_1(x, t)$ by $\phi_1(t)$. It is then possible to express the solution in the interval $x_1 < x < x_2$ in terms of $\phi_1(t)$ and $\psi_1(x)$. Using boundary conditions (a) and (b) and the initial condition (d), a system of Volterra integral equations is obtained. These equations are solved by successive approximation and may be solved graphically.

Mathematical Reviews, 1948, Vol 9, No. 3

DAISLEY, R. P.

2
a
o

Dacov, A. B. On the linear problem of Stepan. Dokl. Akad. Nauk SSSR (N.S.) 58, 56-566 (1947).
The author considers the partial differential equation

$$\begin{aligned} a_1 \frac{\partial^2 u_1}{\partial x^2} &= \frac{\partial u_1}{\partial t} & x < 0 \\ a_1 \frac{\partial^2 u_1}{\partial x^2} &= -\frac{\partial u_1}{\partial t} & x > 0 \end{aligned}$$

subject to $u_1(x, t_0) = \psi_0(x)$, $u_1(x, t_0) = \phi_0(x)$, and along the curve $x = \gamma(t)$: $\frac{dx}{dt} = b_1 \frac{\partial u_1}{\partial x} - b_2 \frac{\partial u_1}{\partial t}$. The general problem is as yet unsolved. The author extends the method of separation of variables to a particular case treated by Stepan [Bull. Acad. Sc. URSS. Sér. Géograph. Geophys., 1946, no. 1, Akad. Nauk SSSR] 11, 37-54 (1947), these Rev. 8, 1947].

R. Bellman /Stanford University Calif.

Source: Mathematical Reviews,

Vol 9 No. 9

~~DAVIEZ, ASSISTANT~~ Heat Propagation in a Body composed of Several layers

B. D. Daviez. Sur la propagation de la chaleur dans un corps à plusieurs couches. Annuaire (Godishnik) Učni Sofia, Fac. Sci. Livre I, 45, 63-91 (1949). (French)

Consider a body composed of several homogeneous layers with the surfaces separating the layers being parallel planes. The problem of heat propagation in this body is equivalent to the corresponding problem in a thin bar A which is composed of n homogeneous parts A_i ($i = 1, 2, \dots, n$) of length l_i , the lateral surface of the bar being impermeable to heat. If the bar is thought of as extending along the x -axis such that the section A_i lies in the interval (x_{i-1}, x_i) , the temperature $u_i(x, t)$ of any such section satisfies the equation (1) $a_i^2 \partial^2 u_i / \partial x^2 = \partial u_i / \partial t$, where $a_i^2 = k_i / (\rho_i \sigma_i)$ with ρ_i , σ_i , and k_i being the density, specific heat, and thermal conductivity, respectively. The initial temperature is given as a function $\Phi_i(x)$ such that (2) $u_i(x, 0) = \Phi_i(x)$, $x_{i-1} < x < x_i$. The temperatures at the extremities O_0 , O_n of A are given by the functions $\phi_0(t)$ and $\phi_n(t)$: (3) $u_1(x_0, t) = \phi_0(t)$, $u_n(x_n, t) = \phi_n(t)$, $t > 0$. At the points O_i common to two adjacent segments, the following conditions hold: (4) $u_i = u_{i+1}$, (4') $\partial u_i / \partial x = k_{i-1} \partial u_{i+1} / \partial x$, $x = x_i$, $t > 0$.

The problem is to find a set of functions $u_i(x, t)$ ($i = 1, \dots, n$) satisfying equations (1), initial conditions (2), and conditions (4) and (4') at the points O_1, O_2, \dots, O_{n-1} .

Source: Mathematical Reviews.

Vol 12 No. 7

with a_i and π . Considering condition (3), let $\phi_i(t)$ indicate the temperature at the point O_i and consider the functions $\psi_{i-1}(t)$ known in the literature which with initial value $\Phi_i(x)$ has the convolution property $\psi_{i-1}(t) * \phi_i(t) = \psi_i(t)$. Then $u_i(x, t)$ can be written in the form (4'), $u_i(x, t) = \psi_i(t) + W_i(x, t)$, where $\psi_i(t) = \phi_i(t) - \int_0^t \phi_i(\tau) d\tau$, (7) $\Gamma_i(x, \xi, t)$,

$$\text{and } -\frac{1}{2l_i} \left[t_{i-1} \left(\frac{x-\xi}{2l_i}, \frac{a_i t}{l_i^2} \right) - v_{i-1} \left(\frac{x-2x_{i-1}+\xi}{2l_i}, \frac{a_i t}{l_i^2} \right) \right],$$

$$(8) \quad v_{i-1}(x, t) = (\pi t)^{-1} \sum_{n=1}^{\infty} \exp \left[-\frac{(x-x_{i-1})^2}{4\pi n^2 t} \right]$$

$$= 1 + 2 \sum_{n=1}^{\infty} \cos 2\pi n x \cdot \exp(-\pi^2 n^2 t),$$

where v_{i-1} represents the function v_i on the interval (x_{i-1}, x_i) . The function $W_i(x, t)$ is given by

$$(9) \quad W_i(x, t) = -\frac{a_i^2}{l_i} \frac{\partial \phi_i}{\partial x} \left(\frac{x-x_{i-1}}{2l_i}, \frac{a_i t}{l_i^2} \right) + \frac{a_i^2}{l_i} \phi_i(t) * \frac{\partial v_i}{\partial x} \left(\frac{x_i-x}{2l_i}, \frac{a_i t}{l_i^2} \right),$$

where the asterisk indicates the following convolution:

$$(10) \quad \phi(t) * (t) = \int_0^t \phi(\tau) \psi(t-\tau) d\tau. \quad \text{The function (5) satisfies}$$

conditions (2) and the conditions (11) $u_i(x_{i+1}, t) = \phi_{i+1}(t)$. The functions u_i satisfy conditions (4) by the way in which they were constructed since both u_i and u_{i+1} become $\phi_i(t)$ for $x = x_i$. In order to show that (4') is satisfied it is necessary to differentiate (8). This gives an expression which is indeterminate at $x = x_i$ so in order to avoid this difficulty (4') is replaced by the following condition: (4'') $k_i \int_0^x (\partial u_i / \partial x) dx = k_{i+1} L_i (\partial u_{i+1} / \partial x)$ which expresses the equality of the quantities of heat which passes

through the point O_i from right to left during the time t . This leads to a system of $n-1$ Volterra integral equations of the first kind for the unknowns c_1, c_2, \dots, c_{n-1} . Having solved this system of equations, the values may then be substituted into the appropriate functions to give the set of functions $u_i(x, t)$ which constitute a solution of the problem. It is shown that this solution is unique. The stationary state problem is treated as a special case in which the $n-1$ integral equations of the preceding reduce to $n-1$ linear equations. If the end section A_n is allowed to become infinite in length while the other sections remain finite in length, the above system of integral equations become a system of Volterra integral equations of the second kind.

C. G. Maple (Wishart, Inc., D.C.)

Source: Mathematical Reviews,

Vol 12 No. 7

Datreff, Assène

Datreff, Assène. Sur le problème linéaire de Stefan.
Bulgarian translation. Univ. Sofia, 1949. Livre I, 45
pp. (1949). (French-Bulgarian summary)
Shows that two semi-infinite bars representing the
continuation of the initial bar.

(3) $\frac{dx}{dt} = c(k_1 \partial u_1 / \partial x - k_2 \partial u_2 / \partial x)_{x=s}$, where x , k_1 , and k_2
are constants. The problem is to find the three functions
 u_1 , u_2 , and $s(t)$ satisfying the equations (1), (1'), (2), (2'),
and (3). The same problem may be obtained by replacing
the above bodies by two bars of the same material lying
along the x -axis, touching at $x=s$, if their lateral surfaces
are impermeable to heat.

The author first solves the auxiliary problem in which he
considers a single bar extending along the x -axis from $x=x_0$
to $x=\infty$. Initially the temperature is given by $b_0(x)$ and


Source: Mathematical Reviews,

the temperature at $x=x_0$ is zero for $t=0$. The heat
which passes through the bar is varied according to
the law $\int_{x_0}^{\infty} u(x,t) dx$, where $u(x,t)$ is the conduction of heat in the
bar with the condition $u(x_0,t)=0$, and the boundary
condition $u(x,t)=s(t)$.

valid for $t < t^{**}(t_0)$. The solution for the interval $[t_0, \infty)$ is
a function $u_n(x,t)$ ($x > x_0$, $t_0 < t \leq t^{**}(t_0)$) which satisfies equation
(4), the initial condition $u_n(x,t_0) = u_{n-1}(x,t_0)$ ($x_0 < x \leq \infty$)
($t_0 < t \leq t^{**}(t_0)$) and the boundary condition $u_n(x_0,t) = 0$
($t_0 < t \leq t^{**}(t_0)$). These solutions are then expressed in terms of
the initial condition $b_0(x)$ and it is shown that the limit
function $u(x,t) = \lim_{n \rightarrow \infty} u_n(x,t)$ ($0 < t < t^{**}(t_0)$) satisfies
equation (4) and is unique.

Returning to the original problem let u_1 represent the
solution of equation (1) with the initial condition (2) and
the boundary condition $u_1(x_0,t) = 0$, and let u_2 represent

Vol. 12 No. 7

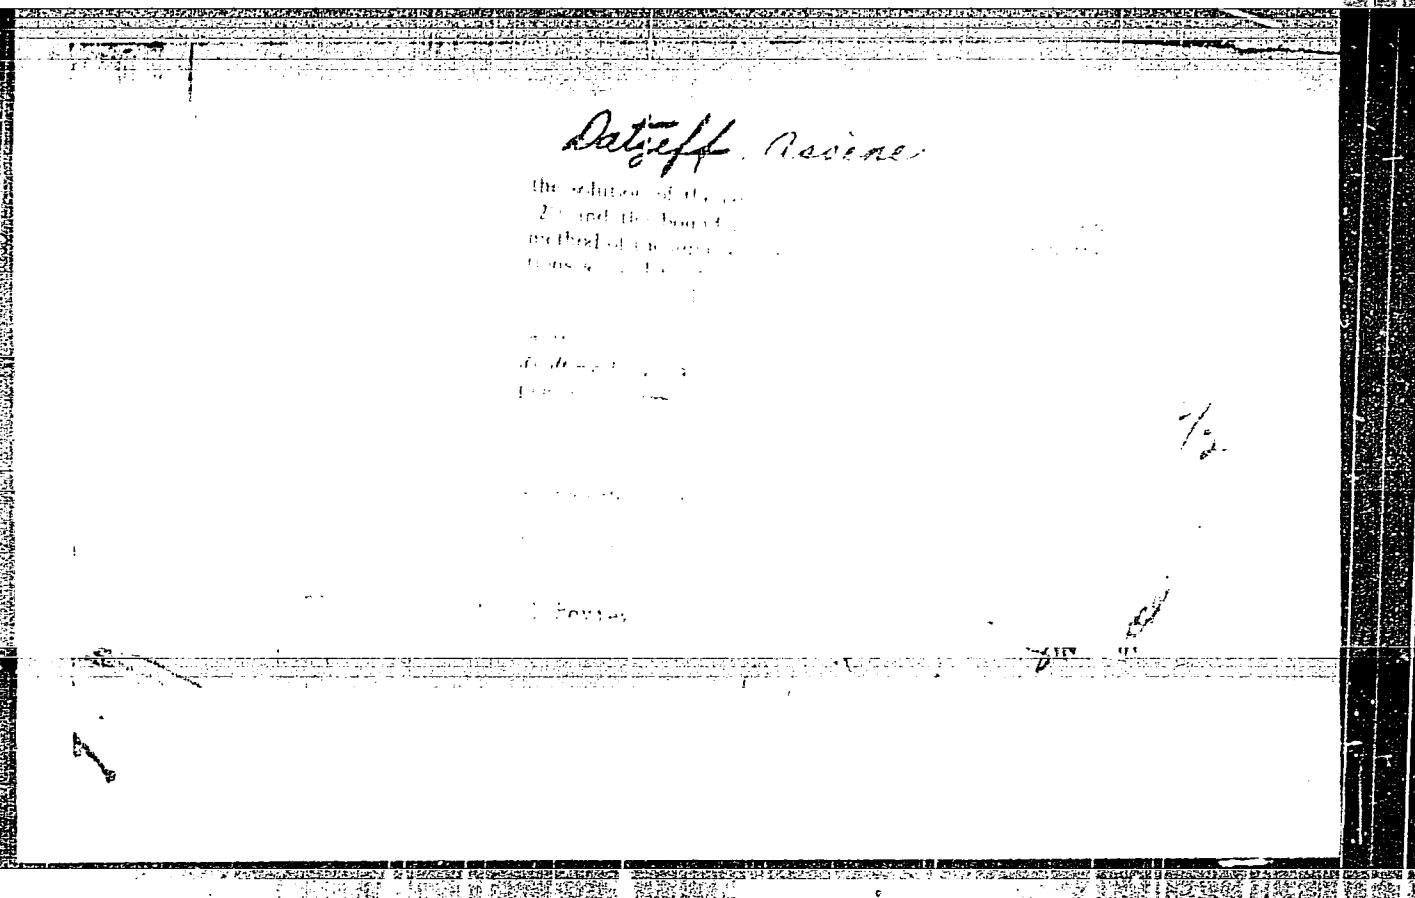

17/11/1981. A. Stefanov

Sur le problème linéaire général
du transfert de chaleur dans un milieu
à plusieurs couches et à plusieurs types
de matériaux. Acad. bulgare Sci. Mat.

1949. Let $\{T_i(x)\}$ denote the temperatures in the i th layer of
a two-dimensional medium consisting of n layers of different
types of different materials. Let $\{k_i\}$ be the thermal conductivities of
the layers, $\{x_i\}$ be the thicknesses of the layers, $\{r_i\}$ be the resistances
of the boundaries between the layers, and $\{q_i\}$ be the heat sources.

Let $R = \sum r_i$ be the total resistance of the boundary between the layers.

Let $K = \sum k_i x_i$ be the total conductivity of the layers.

Let $\{f_i\}$ be the boundary functions.

Source: ~~Material Flow Review~~

No. 2

80/12

Datzeff, Assing.

3
0
0

Datzeff, Assing. Sur certaines analogies mécaniques de la
diffusion de la chaleur. C. R. Acad. Sc. Paris, 200, 1935, p. 1111.

From the solution of the equation of diffusion
of heat at finite length under the condition
that the boundary conditions

are given by the corresponding properties of the
boundary.

Source: Mathematical Reviews, Vol. 12, No. 2

SMU 82

Dacev, Asen.

X Dacev, Asen. The principle of indeterminacy in contemporary physics. *Annuaire [Godišnik] Univ. Sofia. Fac. Sci. Livre 1. 45*, 203-226 (1949). (Bulgarian)
Expository lecture.

Source: Mathematical Reviews.

Vol. 12 No. 51

DATSEV, A. B.

PA L56T90

USSR/Physics - Conductivity, Thermal
Mathematics, Applied Mar/Apr 50
"General Linear Problem of Heat Conductivity of a
Multilayer Medium," A. B. Detsey, Phys Inst, Sofia U,
14 pp

No 2 Iz Ak Nauk SSSR, Ser Geograf i Geofiz" Vol XIV,

Solution of problem of finding temperature distribution
in bar consisting of n homogeneous parts, if
initial temperatures of each rod are known and condi-
tions at ends of rod are given by linear dependency

USSR/Physics - Conductivity, Thermal Mar/Apr 50
(Contd)

With variable coefficients between temperature
and temperature gradient. Submitted by Acad
S. I. Vavilov 14 Nov 49.

156T90

156T90

Racev, A. B. On the linear problem of Stefan. The case of two phases of infinite thickness. Doklady Akad. Nauk SSSR (N.S.) 74, 445-448 (1950). (Russian)

The author considers the system of partial differential equations $a^2 \partial^2 u / \partial x^2 = c u / \partial t$, $x' < x < s(t)$, $b^2 \partial^2 v / \partial x^2 = d v / \partial t$, $d(t) < x < x''$, subject to certain initial conditions. The system was first treated by Stefan in connection with the Stefan problem of solidification and various cases have been considered by him, L. D. Landau, etc.

Engel's monograph [Investigations of the Stefan problem (1947) (see Rev. 8 116) and the author's earlier work (see Rev. 8 363-366, 1947), these Rev., 9, 1950] contains a detailed treatment of the Stefan problem for the case of an interval interval $x' < x < x''$. The author assumes independent variables x and t and solves the equation assumed independently in each subinterval by an iteration method, and shows that the piece-together solution converges to a solution of the original equation.

Source: Mathematical Reviews, Vol 12 No. 4

DAGEV, A. B.

Source: Mathematical Reviews

75, 631-634

Consider the case of separation of two layers of different materials. In this case in are several points from which the separation occurs at some time (such as water in ice). At each point there are two numbers which are alternately in liquid and solid states. If u^* is the temperature in the layer A ($x = h(t), t < t_0$), then satisfies the equation $(1) \frac{\partial u^*}{\partial x} = -\phi(t)$ at where each ϕ is constant. The initial conditions are given by (2) $u^*(x, t_0) = \Phi(x)$ ($x_0 < x < x^*$). At the points of separation of the layers, the condition on constant temperature ϕ is given by (3) $u^*(x^*, t) = u^*(x^*(t), t) = \dots = u^*(x^*(t), t_0) = \phi_0$.

and the end conditions by

$$(3) \quad u^*(x^*, t) = \phi(t) > \phi_0, \quad u^*(x^*, t_0) = \psi(t) > \phi_0, \quad t > t_0.$$

At each interior point of separation, the condition is already satisfied

$$(4) \quad \frac{du^*}{dt} + \kappa \frac{\partial u^*}{\partial x} = -\kappa \frac{\partial \phi}{\partial x}, \quad k = 0, \quad k = 1, 2, \dots, r-1,$$

where $\kappa = (-1)^{k+1}/\rho c$, c is the specific heat and ρ the density. The problem is to find those functions $u^*(x, t)$, $\phi(t)$, $\psi(t)$, $x^*(t)$, $x^*(t_0)$, $x^*(t_0)$ which satisfy (1), (2), (3), (4). The author uses the method of a preceding paper [same Neklyudov (N. S.) 74, 445-448 (1950) Annuaire [Godzinik] Univ. Sofia Fac. Sci. Livre 1, 6: 321-332 (1949); these Rev. 12, 261, 504]. To solve the solution of thus problem.

DATZEFF, Assene

Mathematical Reviews
 Vol. 15 No. 3
 March 1954
Analysis

7-8-54

LL

Dobrot, Asen. Sur la propagation de la chaleur dans une barre non homogène. Annuaire [Godišnik] Fac. Sci. Phya. Math., Univ. Sofia, Livre 1, Partie II. 47, 1-32 (1952). (Bulgarian summary)

Let a non-homogeneous bar of length l extend along the x -axis from $x=x_0$ to $x=x'$ and let the lateral surface of the bar be impermeable to heat. The temperature $u(x, t)$ is defined by the boundary value problem

$$(1) \quad \frac{\partial}{\partial x} \left(k \frac{\partial u}{\partial x} \right) = \rho \sigma \frac{\partial u}{\partial t},$$

where k , ρ and σ are functions of x only, and

$$(2) \quad u(x, 0) = \Phi(x) \quad (x_0 < x < x'),$$

$$(3) \quad u(x_0, t) = \phi(t), \quad u(x', t) = \psi(t) \quad (t > 0),$$

where Φ , ϕ and ψ are arbitrary bounded and integrable functions.

The method of solution is as follows: divide the interval (x_0, x') into n parts by the selection of abscissas $x_0, x_1, x_2, \dots, x_n = x'$ and in the interval (x_{i-1}, x_i) ($i = 1, 2, \dots, n$) replace the functions $k(x)$, $\rho(x)$, $\sigma(x)$ by the constant values $k_{ia} = k(x_{i-1})$, $\rho_{ia} = \rho(x_{i-1})$, $\sigma_{ia} = \sigma(x_{i-1})$, respectively. Then in the interval (x_{i-1}, x_i) equation (1) is replaced by

$$(4) \quad a^2_{ia} \frac{\partial^2 u_{ia}}{\partial x^2} = \frac{\partial u_{ia}}{\partial t}, \quad a^2_{ia} = \frac{k_{ia}'}{\rho_{ia} \sigma_{ia}} \quad (i = 1, 2, \dots, n),$$

where u_{ia} is the temperature function in the interval (x_{i-1}, x_i) . The conditions that must be satisfied at the interior points of the subdivision are

$$(5) \quad u_{1n}(x_1, t) = U_{1+n}(x_1, t),$$

$$(6) \quad k_{1n} \frac{\partial u_{1n}(x_1, t)}{\partial x} = k_{1+n} \frac{\partial U_{1+n}(x_1, t)}{\partial x},$$

(6)

$$\frac{\partial u}{\partial x}(x', t) + \alpha_1(t)u(x', t) + \beta_1(t) = 0,$$

where $\alpha_1, \alpha_0, \beta_1, \beta_0$ are bounded integrable functions for $t > 0$.

C. G. Maple (Ames, Iowa).

At the ends it is required that


$$(7) \quad u_{1n}(x_0, t) = \phi(t), \quad u_{1n}(x', t) = \psi(t), \quad (t > 0).$$

The solutions to problems (4) subject to the appropriate conditions from (5), (6) and (7) are found by a method discussed in previous papers. [See Datsoff, *Trans. Rev. S.* 146, 147; 12, 263, 504].

The solution to the problem given by (1), (2) and (3) is found from the above by passing to the limit as $n \rightarrow \infty$. It is shown that: (a) the sequence $u_n(x, t)$ is bounded for fixed n , that is, $|U_n(x, t)| < M$ ($x_0 < x < x'$, $t > 0$; $n = 1, 2, \dots, p$), (b) the limit $\lim_{n \rightarrow \infty} u_n(x, t)$ satisfies equation (1), (c) the sequence $\{u_n(x, t)\}$ has a limit as $n \rightarrow \infty$, (d) the boundary conditions are satisfied, and (e) the solution is unique. The particular case for which $\partial u / \partial t = 0$ is solved for the boundary conditions $u(x_0) = C_0$, $u(x') = C'$ and the solution is shown to be attainable as special case of the solution of the more general problem defined by (1), (2) and (3).

The results are extended to include the case for which the length of the bar is infinite. Another extension considers the author to apply the method to obtain a solution of the problem defined by (1), (2) with the boundary conditions (3) replaced by

$$\frac{\partial u}{\partial x}(x_0, t) + \alpha_1(t)u(x_0, t) + \beta_1(t) = 0.$$

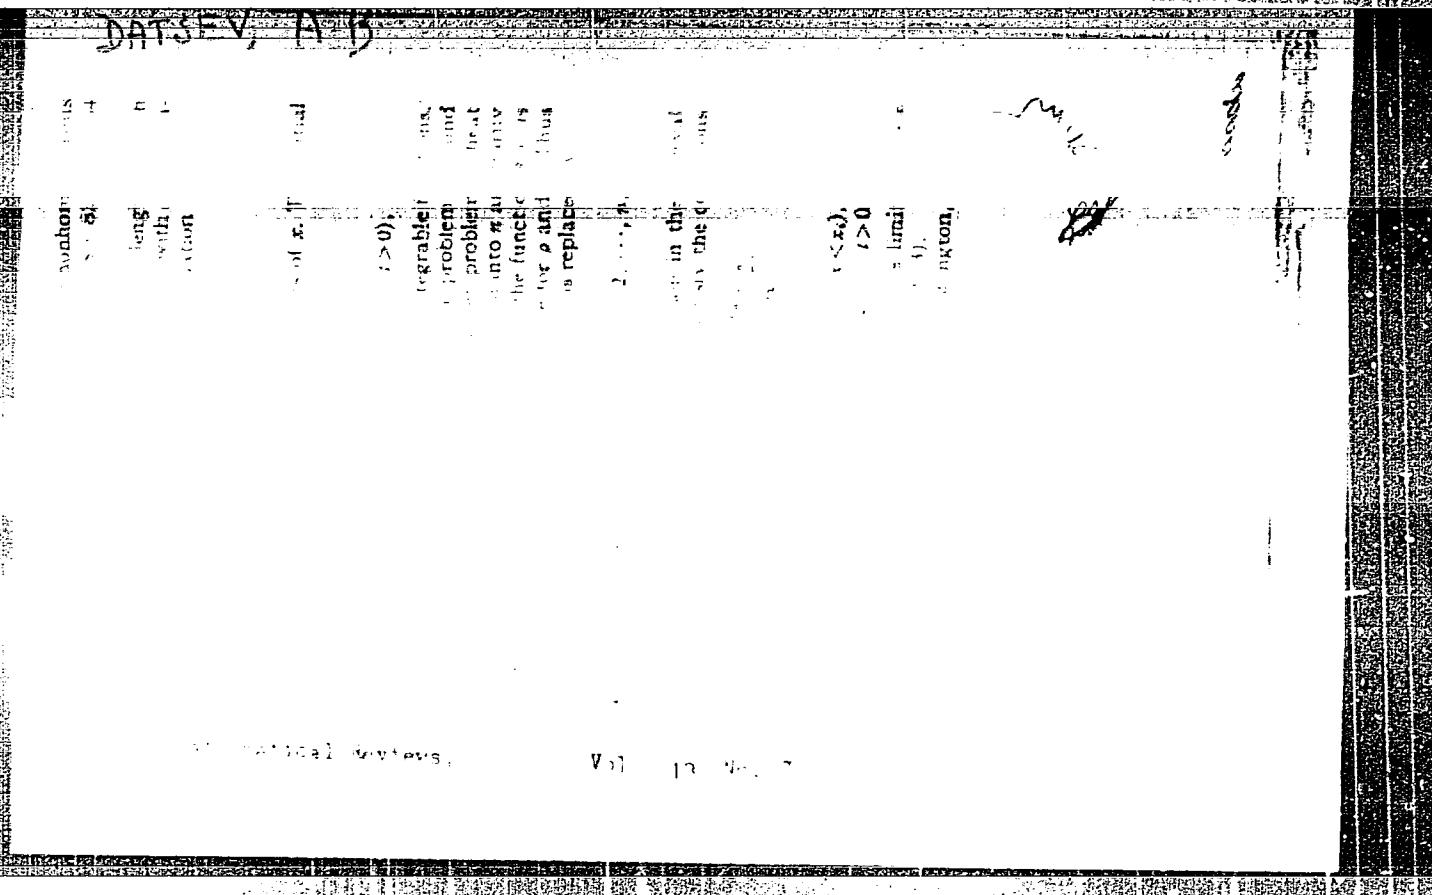

DATSEV, A. B.

21 Nov 52

USSR/Physics - Phase State
"Appearance of Phase in the Linear Stefan Problem,"
A. B. Datsev, Sofia U, Sofia, Bulgaria

"Dok Ak Nauk SSSR" Vol 87, No 3, pp 353-356

In previous works ("Dok Ak Nauk SSSR" 1949 - 1950)
the author solved the linear Stefan problem (problem
of solidification) for rather general conditions by
means of a method which he developed, for the case
where the initial lengths of the phases are finite.

245T102

PA 245T102

245T102

DATSEV, A.

The propagation of heat in a multistrata media in the case of two or three dimensions. In French. p. 139. (GODISHNIK. MATEMATIKA I FIZIKA, Vol. 49, No. 1, 1954/55 (published 1956), Sofia, Bulgaria)

SO: Monthly List of East European Accessions (EEAL) LC, Vol. 6, No. 9, Sep 1957. Uncl.

DACEV, A.B.

SUBJECT USSR/MATHEMATICS/Differential equations CARD 1/2 PG - 334
 AUTHOR DACEV A.B. 335
 TITLE On the two-dimensional Stefan's problem.
 On the three-dimensional Stefan's problem.
 PERIODICAL Doklady Akad. Nauk 101, 441-444 (1955)
 Doklady Akad. Nauk 101, 629-632 (1955)
 reviewed 10/1956

In the two-dimensional case functions $u^{(1)}$, $u^{(2)}$, s , f , g are required which satisfy the conditions

$$a_m^2 \Delta u^{(m)} = \frac{\partial u^{(m)}}{\partial t}, \quad u^{(m)}(x, y, t_0) = \phi_m(x, y), \quad u^{(m)}(L) = 0, \quad m = 1, 2,$$

$$f_t'^2 + g_t'^2 = s_t'^2, \quad f_t' f_\alpha' + g_t' g_\alpha' = 0, \quad \frac{ds}{dt} = l(k_1 \frac{\partial u^{(1)}}{\partial v} - k_2 \frac{\partial u^{(2)}}{\partial v})$$

$x = f(\alpha, s(\alpha, t))$
 $y = g(\alpha, s(\alpha, t))$

Here $u^{(1)}$ and $u^{(2)}$ are the temperatures of two states of aggregation of the same material which are separated by the curve l . In the course of time l describes the surface L . The second equation is the initial condition, the third one the boundary condition. The orthogonal trajectories of the curves $l(t)$ on L are $x = f(\alpha, s(\alpha, t))$, $y = g(\alpha, s(\alpha, t))$, where $s(\alpha, t)$ is the

the advanced case of heat conduction in the composite region consisting of an infinite homogeneous cylindrical core of arbitrary cross section surrounded by another homogeneous medium of finite thickness. The outer boundary conditions and the initial conditions and the continuous variation both at the

A.B.

value and of the flux at the surface of separation of the two media. The method can be applied also for other types of the space conditions.

Paper is a substantial contribution to theoretical treatment of strained problems of heat conduction. Of course, practical application may be very complicated.

V. Vodicka, Czechoslovakia

DATSEV, A. B.

USER/Physics - Heat conductivity

Card 1/1 Pub. 22 - 11/47

Authors : Datsev, A. B.

Title : On the three-dimensional multilayer problem of heat conductivity

Periodical : Dok. AN SSSR 101/6, 1019 - 1021, Apr. 21, 1955

Abstract : The method for solving the heat conductivity equation developed by the author for one and two-dimensional cases is now generalized for the three-dimensional multilayer cases. Four USSR references (1947-1955).

Institution : State University, Sophia, Bulgaria

Presented by: Academician S. L. Sobolev, January 7, 1955

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEV, A.B.

Interpretation of quantum mechanics. Godishnik fiz mat 53 no.2:
31-46 '58/'59 [publ. '60].

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

BULGARIA/Atomic and Molecular Physics - Statistical Physics.
Thermodynamics.

D

Abs Jour : Ref Zhur Fizika, No 2, 1960, 3214

Author : Datzeff, A.B.

Inst : The University, Sofia, Bulgaria

Title : Concerning One Case of Motion of Molecules

Orig Pub : Dokl. Bolg. AN, 1959, 12, No 2, 105-108

Abstract : The author considers the motion of non-interacting point molecules, contained in a rectangle, which are reflected from the walls as elastic spheres. It is assumed that at the initial instant of time $t = 0$ the molecules are located in a circle and have identical radial velocity. It is shown (without statistical considerations) that the distribution of the molecules tends to equilibrium at $t \rightarrow 0$.

Card 1/1

S/058/62/000/005/007/119
A160/A101

AUTHOR: Datsev, A. B.

TITLE: The interpretation of quantum mechanics. II. The determination of the probability of locating a particle at a given point

PERIODICAL: Referativnyy zhurnal, Fizika, no. 5, 1962, 16, abstract 5A182 ("Godishnik Sofiysk. un-t. Fiz.-matem. fak", 1959-1960 (1961), 54, no. 2, 121-142, Bulgarian; French summary)

TEXT: As in part I (RZhFiz, 1961, 2A204), considered is an attempt of introducing in physics ether of a discrete kind, called by the author subvacuum. This subvacuum is considered a "material carrier" of the field. The elements of which the subvacuum consists may be grouped; they form the particles and the field. Hereby, all values characterizing the particle or the field may fluctuate. Thus, the particle, reacting with the field, possesses some state of motion characterized by the probability $W(x, y, z)$ of locating a particle at a given point (x, y, z) . The function represented in a form of the square of function F for which the equation of Schrödinger was obtained.

[Abstracter's note: Complete translation]

A. Temkin

Card 1/1

S/058/62/000/005/008/119
A160/A101

AUTHOR: Datsev. A. B.

TITLE: The interpretation of quantum mechanics. III. The relations of indeterminacy. Observation and reality.

PERIODICAL: Referativnyy zhurnal, Fizika, no. 5, 1962, 17, abstract 5A183 ("Godishnik Sofiysk. un-t. Fiz.-matem. fak.", 1959-1960 (1961), 54, no. 2, 143-175. Bulgarian; French summary)

TEXT: The author believes that the mathematical apparatus set forth by his theory (part II, see Ref. 5A182) leads to the same results as the non-relativistic quantum mechanics, and, among others, also to the Heisenberg principle of indeterminacy. Hereby, the principle of correspondence is used. However, the author assumes that, regardless of the identity of the mathematical apparatus, the obtained results have another sense than in quantum mechanics, since they are based on the classical concepts of causality.

A. Temkin

[Abstracter's note: Complete translation]

Card 1/1

DATSEV, Asen B., akad.

Academician Kiril Popov, laureate of the Dimitrov Award. Fiz mat
spisanie BAN 5 no.2:149-150 '62.

1. Chlen na Redkatsionnata kolegiia, "Fiziko-matematichesko spisanie".

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEV, A.B.

Conference on the Theory of Solid Body in Moscow. Fiz mat spisanie
BAN 7 no.1:70-71 '64.

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEV, Aa. B., akad.

Honoring Galileo in East Germany. Fiz mat spisanie BAN 7 no.2:
152 '64.

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATSEV, P. (Rybinsk); KOTIKOV, I. (pos. Revda, Murmanskaya obl.);
MIKHAYLIK, P. (Sukhumi); KONOSHENKO, A. (Arkhangel'sk);
BOGDANOV, T. (Syktyvkar, Komi ASSR); VISKOV, V. (Chelyabinsk);
SEREGIN, S. (Vorkuta)

Are stationary fire escape ladders necessary? Fozh.delo 8
no. 6:26 Je '62. (MIRA 15:6)
(Fire escapes)

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSEVICH, L. I., (Scientific Co-Worker, State Scientific-Control Insitute of Veterinary Preparations)

"Identification of Brucella types by a method of differential staining."

Veterinariya, Vol 39, no. 1, Jan 1962. pp 79

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

IVANOV, M.M.; DATSEVICH, L.I.

Method for the quantitative determination of live Brucella in
brucellosis vaccine. Zhur.mikrobiol., epid. i immun. 33 no.3:
46-50 Mr '62. (MIRA 15:4)

1. Iz Gosudarstvennogo nauchno-kontrol'nogo instituta veterinarnykh
preparatov Ministerstva sel'skogo khozyaystva SSSR.
(BRUCELLA) (VACCINES)

DATSEVICH, L.I., nauchnyy sotrudnik

Determining Brucella types by differential staining. Veterinariia
39 no.1:79-80 Ja '62. (MIRA 15:2)

1. Gosudarstvennyy nauchno-kontrol'nyy institut veterinarnykh
preparatov.

(Brucella)
(Stains and staining (Microscopy))

FEDENYUK, A. I. ; DATSEVICH, M. A.

Agricultural Machinery

Using the simplest mechanism for stacking hay. M. A. Datsevich, A. I. Fedenyuk. Korm. baza 3, No. 6, 1952.

Monthly List of Russian Accessions, Library of Congress, September 1952. UNCLASSIFIED.

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSIKOV, V. V.

Chaplin, N. M. and Datsikov, V. V. - "Water supply for animal husbandry in Karz-Kum, Turkmen SSR," Trudy (Vsesoyuz. nauch.-issled. in-t gidrotehniki i melioratsii), Vol. XXV, Issue 2, 1948, p. 100-22

SO: U-4355, 14 August 53, (Letopis 'Zhurnal 'nykh Statey, No. 15, 1949)

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

VISHNEVSKIY, V.N. [Vishnev's'kyi, V.N.]; LYSKOVICH, A.B. [Lyskovych, O.B.];
PIDZYRAYLO, N.S. [Pidsyrailo, M.S.]; DATSISHIN, A.M. [Datsyshyn, A.M.]

Photoluminescence excitation spectra of NaI(Tl) crystals. Ukr.
fiz. zhur. 7 no.10:1127-1128 O '62. (MIRA 16:1)

1. L'vovskiy gosudarstvennyy universitet im. I.Franko.
(Phosphors) (Spectrum analysis)

BEZBORODOVA, A.; DATSIV, V.; VANYUKOV, K.

Practices of apartment-house offices in taking care of children.
Zhil.-kom. khos. 8 no.12:20-21 '58. (MIRA 13:1)

1.Sekretar' Chelyabinskogo gorkoma komsomola (for Bezborodova).
2.Sekretar' Ufimskogo gorkoma komsomola (for Datsiv). 3.Predsedatel'
roditel'skogo komiteta pri zhilishchnoy kontore No.3 Petrogradskogo
rayona Leningrada.

(Children--Management)

D A T S K E V I C H , A . A .

USSR/Physics of the Earth - Geophysical Prospecting, 0-5

Abst Journal: Referat Zhur - Fizika, No 12, 1956, 36442

Author: Datskevich, A. A.

Institution: None

Title: Testing Seismic Receivers

Original
Periodical: Prikl. geofizika, 1956, No 14, 47-64

Abstract: A seismic receiver is considered as an electromechanical 4-terminal network, the input side of which is characterized by the applied force and a velocity, and the output by a current and a voltage. The connection existing between the input and output quantities is examined. The seismic receiver, when tested, is connected electrically through a resistance box to an audio frequency oscillator and is set on a special test stand, comprising 2 ebonite discs and 3 piezoelectric transducers made of Rochelle salt, compressed between the discs. The test stand is mounted on a heavy foundation. The piezoelectric transducers of the test stand are

Card 1/2

D A T S K E V I C H , A . A .

07225003

3(5)

PHASE I BOOK EXPLOITATION

SOV/2819

Vsesoyuznyy nauchno-issledovatel'skiy institut geofizicheskikh metodov razvedki

Razvedochnaya i promyslovaya geofizika, vyp. 23 (Exploration and Industrial Geophysics, Nr 23) Moscow, Gostoptekhizdat, 1958. 77 p. (Series: Obmen proizvodstvennym optyom) Errata slip inserted. 4,000 copies printed.

Ed.: A.I. Bogdanov; Exec. Ed.: Ye.G. Pershina; Tech. Ed.: A.S. Polosina.

PURPOSE: This booklet is intended for geophysicists as well as engineering and technical personnel in the petroleum industry.

COVERAGE: This collection of articles describes new equipment and instruments used in the petroleum industry. Individual articles discuss the single-cable electronic thermometer and the magnetic logging locator. Regional exploration problems such as electrical sounding at sea, electrical survey in permafrost areas etc. are also treated. References accompany each article.

TABLE OF CONTENTS:

Datskevich, A.A. Magnetic Logging Locator	3
Aksel'rod, S.M. Single-Cable Electronic Thermometer	16
Card 1/2	

Exploration and Industrial Geophysics (Cont.)	SOV/2819
Bashlykin, I.I. An Example of the Relationship Between a Rock's Potential Resistivity and Its Reservoir Properties	19
Aksenovich, G.I., et al. Recording the Moment of Explosion in Deep Seismic Logging	21
Terekhin, Ye. I. Theoretical Curves of Marine Electrical Logging	30
Faradzhev, A.S. Simulation of Electrical Logging for Screening and Step-like Effects	38
Kalenov, Ye.N. Use of Electrical Surveying Under Permafrost Conditions	44
Ayzenberg, M.A. Density of Rocks in Gruziya	58
Sazhina, N.B. Regarding Errors in Marine Gravimetric Measurements Made From Surface Vessels	70
Avchyan, G.M. Possibility of Extending the Boundaries of a Dolginov Magnetometer Scale by the Comparative Method	74

AVAILABLE: Library of Congress

Card 2/2

MM/mg
12-31-59

DATOKAUCH-A.A.

11(4) PHASE I BOOK EXPLOITATION 307/2124

Mashinostroitskoye sovetskoye po voprosam novoy tekhniki v petrofizicheskoy prochnosti. Moscow, 1956

Barvedia I. rassorbchika neftyanym i gazovym sektoromendy: materialnye sovetschaniya. T. 1. Prospecting and Development of Oil and Gas Deposits. Report of the Inter-Union Conference on New Techniques in the Petroleum Industry. Vol. 1) Moscow, Gosstopchislizdat, 1956. 311 p. Errata slip inserted. 1,500 copies printed.

Eds.: I. M. Marav'yev, Professor, Doctor of Technical Sciences,

and V. N. Dakhnov, Professor, Doctor of Geological and Mineralogical Sciences; Editorial Board: K. P. Zil'shch, Professor

(Resp. Ed.) I. M. Marav'yev, Professor; A. A. Likhach'ev, Professor

Candidate of Economical Sciences; V. I. Repov, Candidate of

Economical Sciences; M. M. Charygin, Professor; P. P.

Dunarev, Professor; M. I. Chernozubov, Professor; Ya. M.

Kuznetsov, Professor; I. A. Charushov, Professor; G. M. Pan-

kin, Professor; V. N. Dakhnov, Professor, Doctor of Geolo-

gical and Mineralogical Sciences; N. S. Matukhin, Doctor

of Chemical Sciences; M. A. Almazov, Docent; V. M. Vinogradov,

Candidate of Technical Sciences; V. I. Biryukov, Candidate of

Candidate of Technical Sciences; A. I. Zaytsev, and V. M. Gurevich;

Scientific Ed.; N. P. Dobrynnik; Tech. Ed.: E. A. Mukhina.

PURPOSE: The book is intended for engineers and scientific personnel working in the petroleum industry and universities. It may also serve as a textbook for advanced students of petroleum sciences.

COVERAGE: The book contains articles written by staff members of the Moscow, Grozny, and Ufa Petroleum Institutes, the Rybach'ev and Azerbaidzhan Industrial Institutes, the Urals (Ufa), Sait-Gash, and Tadzhikian Research Institutes, VNIIP (All-Union Scientific Research Institute of Oil Drilling), KBNF (Design Office of Petroleum Instrument Making), the Bashneft Association (Bashkiria Petroleum). These papers, read at the Kazakh (Kazakhstan) Scientific Conference, deal with new techniques in the petroleum industry introduced since 1956. Emphasis is given particularly to the importance of efficient drilling, geophysical prospecting, working on oil and gas deposits, and the use of new devices employed in oil and gas exploitation. There are 52 references in Soviet, and 8 English.

Zil'shch, K. P., I. K. Mukhin, V. M. Dushkov, and N. M. Goncharov (Moscow, Petroleum Institute).

Oil-base drilling fluids.

The authors state that petroleum-base drilling fluids are being used to open productive horizons to maintain the penetration rate at the bore-hole zone, and to increase the well output. The use of petroleum-base drilling fluids is particularly efficient for opening formations with high permeability and low pressure, where the absorption of a large amount of mud by the productive formation may prove dangerous. Petroleum-base drilling fluids also prove useful in openings formations with low permeability, particularly where the formations contain swelling clay. Petroleum-base drilling fluids produce good results in drilling under complex geological conditions and in drilling deep and directional wells.

Bogatinikov, I. A. [Moscow Petroleum Institute]. Revision of the Karpov Method and the Grouping Methods
The author describes the so-called KRP method recently developed at the Institute's Seismological Laboratory with the aid of the VNI (All-Union Research Institute) of Geophysics and passed on to the petroleum industry. He mentions the results obtained in field and laboratory testing while using a basic modification of the KRP method.

Abdullaev, R. A. [Azerbaijan Industrial Institute]. Precise and Approximate Methods for Interpretation of Travel-Time Curves of Reflected Waves
The author records several approximate and precise analytical and graphic methods for determining effective speeds with the use of travel-time curves of reflected waves.

Pastorovich, A. A. [KRN - Design Office for Petroleum Instruments - Department of Automatic-Geophysical Field Stations] 196
The author states that his KRN office cooperates with the design offices of the Seismologist (Petroleum Tharrawat), Geophysics (Geophysics), and the Neftekhimicheskaya (Intrafield) Plants in manufacturing the largest amount of new industrial geophysical equipment in the petroleum industry. Because of the large demand by the industry, the volume produced by the KRN office was inadequate and production was doubled in 1957. The KRN has an experimental plant, a model shop, and laboratories.

Dashkov, V. M., and A. I. Kholin [Moscow Petroleum Institute]. On the Problem of Quantitative Evaluation of Residual Oil Saturation of a Reservoir Carried Out by Radioactive Methods 209

The authors state that the determination of the type of liquid saturating the formation reservoir encased in the well poses one of the major problems for advancing the technology of petroleum exploration. Constant observation of the movements and changes in water-oil contact in all wells is essential, and the radiometric method, developed between 1953 and 1955 at the Laboratory No. 1 of the NII (Moscow Petroleum Institute), helps determine the type of liquid saturating the formation, answering the purpose.

Bazantsov, O. A. [Moscow Petroleum Institute]. Some Theoretical Problems on Neutron Methods for Separating Oil-bearing Formations From Water-bearing Formations 218

The author refers to the experiments conducted at the NII and other organizations which contributed to the development of methods to separate oil-bearing from water-bearing formations; he describes several physical processes that take place during neutron study methods and presents pertinent evaluating calculations.

Chernykh, I. A. [Moscow Petroleum Institute]. One of the Integral Equations of the Filtration Theory and Some of Its Applications 230
The author gives a detailed description and graphs calculations of an integral equation of the filtration theory.

Bolash, P. M. [Moscow Petroleum Institute]. On Equations Used for Determining Yields 248
The author shows the connection between differential equations of filtration, and the equations of formations of fields.

Puchachev, G. B. [Grozny Petroleum Institute]. Determining Properties of an Oil-bearing Formation Having a Low Gas Saturation 257
The author reviews filtration in mixed liquid and gas phase formations and submits equations.

Pereverzov, S. M. [Naryshhev Industrial Institute]. The Role and Significance of Hydraulics in Exploitation of Oil Deposits 265
The author is opposed to the exploitation of new deposits with dissolved gases in petroleum production under prevailing techniques during the initial period, particularly when it is intended to convert the technique by secondary methods. This system has been responsible for depleting many old petroleum deposits (Baku, Grozny, Krnodar, etc.).

(9)

5(3)

AUTHORS: Datskevich, A. A., Zhukhovitskiy, A. A., Turkel'taub, N. M. SOV/32-25-2-40/78

TITLE: Apparatus and Technical Equipment for Laboratory Work (Pribory i tekhnika laboratornoy raboty). Sorption-Thermal Apparatus for the Analysis of Gas Mixtures(Sorbtionno-termicheskiye pribory dlya analiza gazovykh smesey)

PERIODICAL: Zavodskaya Laboratoriya, 1959, Vol 25, Nr 2,
pp 210 - 212 (USSR)

ABSTRACT: The use of stationary chromatothermography (CTG) permits the thermal enrichment to take place simultaneously with a breadthwise enrichment, since the adsorption zones tend to gradually be compressed. These localized zones make it possible to carry out automatically both a quantitative and qualitative analysis. A thermodynamical apparatus KHT-2 has been designed which permits analyses by three methods: stationary (CTG) with continuous or intermittent gas supply, and non-stationary (CTG). It is possible to analyze multi-component gas mixtures of saturated and unsaturated hydrocarbons and their isomers through C₆ as well as low-boiling

Card 1/2

Apparatus and Technical Equipment for Laboratory Work. SOV/32-25-2-40/78
Sorption-Thermal Apparatus for the Analysis of Gas Mixtures

gases. The taking of samples and pressure are automatically controlled by a timer and pressure regulator, and the component quantities contained in the mixture are recorded by an electron potentiometer EPP-09. The apparatus (Fig 1) consists of a separating column with a dosing unit, gas analyzer, and a stand for the recording instruments and control panels. Silica gel or aluminum oxide are used as sorbents, the gas carrier is purified air. A diagram of the analysis of an ethane-ethylene-propane-propylene-isobutane-butane mixture is given (Fig 2). The apparatus KhT-3 has been designed to afford more flexibility in the analyses. It is based on combined use of distribution and adsorption chromatography and (CTG). It was designed on the principle of the separation and analysis setup of the universal chromatograph VNIGNI (Ref)(Fig 3). A model of this setup (without an automatic arrangement) was tested simultaneously with the KhT-2 apparatus in the gas-logging in the Saratov area and at the Moskovskiy neftyanoy pererabatyvayushchiy zavod (Moscow Petroleum Refining Plant). There are 3 figures and 4 Soviet references.

Card 2/2

ZHUKHOVITSKIY, A.A., otv.red.; VAGIN, Ye.V., red.; GOL'BERT, K.M., red.; DATSKEVICH, A.A., red.; TURKEL'TAUB, N.M., red.; VESZKO, Ye.P., red.; YANOVSKIY, M.I., red.; VLASOV, L.G., red.izd-va; ASTAF'IEVA, A.G., tekhn.red.

[Gas chromatography; transactions of the First All-Union Conference on Gas Chromatography] Gazovaya khromatografiia; trudy Pervoi Vsesoyuznoi konferentsii po gazovoi khromatografii. Moskva, Izd-vo Akad.nauk SSSR, 1960. 326 p. (MIRA 14:3)

1. Vsesoyuznaya konferentsiya po gazovoy khromatografii. 1st,
Moscow, 1959.
(gas chromatography)

83688

S/032/60/026/009/002/018
B015/B058

// 3000

AUTHORS: Datskevich, A. A., Zhigacheva, L. P., Krasnova, G. V.,
Lapitskaya, M. D., Latukhova, A. G., Moshinskaya, M. B.

TITLE: Determination of Small Amounts of Hydrogen in Helium

PERIODICAL: Zavodskaya laboratoriya, 1960, Vol. 26, No. 9,
pp. 1082 - 1083

TEXT: A method of determining hydrogen in helium according to the adsorption development chromatography was elaborated. The experiments were made on a XT-2M (KhT-2M) chromatographic instrument with a developer based on the thermochemical principle (Ref. 1). The working conditions were selected in such a way that a detector could determine both components by two characteristics, i.e., helium by the thermal conductivity and hydrogen by the heat of combustion. A 6 m long metallic separation column, filled with CKT (SKT) coal and with air as carrier gas, was used for analyses at room temperature. The sensitivity to hydrogen amounted to 0.5% at a relative accuracy of 5%. A 10 m long polyvinyl chloride tube was used for analyses at low temperatures and work was carried out

Card 1/2

83688

Determination of Small Amounts of Hydrogen in Helium S/032/60/026/009/002/018
B015/B058

at -35°C , making it possible to obtain a better separation and to use larger sample quantities, so that the sensitivity rose to 0.05%. A comparison of the measuring results on the KhT-2M instrument with those obtained at a combustion over copper oxide is tabulated. There are 2 figures, 1 table, and 1 Soviet reference.

ASSOCIATION: Konstruktorskoye byuro avtomatiki i telemekhaniki
(Design Office for Automation and Telemechanics).
Vsesoyuznyy nauchno-issledovatel'skiy geologorazvedochnyy
neftyanoy institut (All-Union Petroleum Scientific Re-
search Institute of Geological Survey). Moskovskiy zavod
szhizheniya prirodnogo gaza (Moscow Plant for Liquefying
Natural Gas)

Card 2/2

KOTEL'NIKOV, B.P., inzh.; DATSKEVICH, A.A., kand.tekhn.nauk

Method of determining the composition of mixtures of fatty acids
and aliphatic alcohols. Masl.-zhir.prom. 26 no.5:20-26 My '60.
(MIRA 13:12)

(Acids, Fatty) (Alcohols)
 (Gas chromatography)

L 11957-65 EWT(m)/EPF(c)/T/EWP(j) Pe-h/Pr-h/Pn-h SE/AEDC(b)/AEDC(a)/
AS(mp)-2/ASD(p)-3 RM/MLK 8/0000/64/000/000 0099/0108
ACCESSION NR: AT4048191

AUTHOR: Alekseyeva, A. V., Berman, S.S., Gol'bert, K. A., Datskevich, A. A.,
Moshinskaya, M. B., Fomina, A. I.

TITLE: Determination of trace impurities in monomers

SOURCE: Vsesoyuznaya nauchno-tehnicheskaya konferentsiya po gazovoy khromatografii. 2d, Moscow, 1962. (Gazovaya khromatografiya (gas chromatography); trudy* konferentsii. Moscow, Izd-vo Nauka, 1964, 99-108)

TOPIC TAGS: monomer analysis, impurity determination, gas chromatography, flame ionization detector, molecular sieve, thermal conductivity detector

ABSTRACT: The paper concerns the determination of trace impurities in ethylene and propylene to be used as raw materials for polymers and copolymers. Light impurities (H_2 , N_2 , O_2 , CO_2 , CH_4) were determined with the thermal conductivity detector G-9, heavy impurities with the flame ionization detector. The sensitivity was increased considerably by the use of programmed temperatures. The determination of light impurities is based on the enrichment effect obtained if the impurities are adsorbed to a lesser degree than the main component; the width of the band of heavy components was determined by the coefficient of their adsorbability from the mixture, that of the light

Card 1/3

L 114957-65

ACCESSION NR: AT4048191

impurities by the spread of the adsorptive zone of the main component (ethylene, propylene). Formulas for finding the enrichment value are presented. Two adsorption columns were used, the first for enrichment, the second for separation. Separation of N₂ and O₂ required the use of a molecular sieve in the column, with silica gel as the adsorbent. With small loads the degree of enrichment increased linearly with the amount of the specimen introduced, but there was a limit to the latter. Simultaneous tests were conducted with the concentrator at temperatures of -17 and 20°C and with the molecular sieves at 40°C, with satisfactory results. Heavy impurities (C₁-C₄) were satisfactorily separated on, for example, aluminum oxide, charcoal, or diethyldiethyl sulfide using the flame-ionization detector made by GFA. Tetrachlorethane and tripolyphosphate modifiers were also tested. This work served as a basis for the development of the KBTM-1 chromatograph (1961). The apparatus is described and illustrated schematically. It was concluded that programmed temperature would lead to a several-fold increase in the heights of the peaks, but that even slow heating may with a very pure carrier gas. Various adsorbents may be used. Only two figures and 2 formulas.

ASSOCIATION: None

Card

2/3

L 14957-65

ACCESSION NR: AT4048191

SUBMITTED: 16Jul64

ENCL: 00

SUB CODE: *EE, NP*

NO REF SOV: 001

OTHER: 000

3/3

Card

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

ZHUKHOVITSKIY, A.A.; LAPKIN, L.M.; DATSKOVICH, A.A.

Zero line in vacantochromatography as a basis of continuous dose-less analysis. Dokl. AN SSSR 162 no.5:1089-1091 Je '65. (MIRA 18:7)

I. Moskovskiy institut stali i splavov. Submitted November 30, 1964.

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATCHEVICH, L. A.

Rubber abst.
V-3) Dec 1953
Synthetic Rubbers
and like products

5084. Copolymerization reaction of ~~unspecified~~ with glycols. V. A. STRELIKHIREV, I. A. Gerasimova, and I. D. Lidsky. V. A. KORSHAK, B. M. KALINOV, and L. A. DATCHEVICH. Khim. i. Fiz. Khim. Vysokomol. Soedinenii. Doklady 7-oi Konf. Vysokomolekul. Soedineniyam 1958, 69-87; Chem. Abstr. 103, 47, 7820. The copolymerisation of diphenylmethane diisocyanate with 1, 4-butanediol was investigated and an expression deduced for the mol.wt. of the product. The highest mol. wt. is attained near the equimolecular proportion of monomers. Addition of an alcohol or piperidine causes a severe drop in mol. wt. The viscosity of the mixture becomes constant after about 10 hrs. at 130° to 170° C. Tertiary amines catalyse the reaction, and the highest viscosities are produced in xylene or chlorobenzene solution. The product is a solid of mol. wt. up to 34,000, melting at about 163° and decomposing above 216° C. 358MAN12

(6)

N.Y.-27-54

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

LOSEV, I.P.; DATSKEVICH, L.A.

Polyurethan films. Biul. tekhn.-ekon. inform. no.8:10-11 '58.
(MIRA 11:10)

(Plastics) (Carbamic acid)

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

87433
S/191/60/000/010/005/017
B004/B060

158460

AUTHORS: Losev, I. P., Datskevich, L. A., Mayboroda, V. D.

TITLE: Synthesis and Investigation of Foam Plastics From Polyesters
of Terephthalic Acid and 2,4-Toluylene Diisocyanate

PERIODICAL: Plasticheskiye massy, 1960, No. 10, pp. 14-16

TEXT: The authors based on Western papers to synthesize foam plastics from polyesters of terephthalic acid and 2,4-toluylene diisocyanate. The polyesters were synthesized by allowing diethylene glycol, triethylene glycol or glycerin to enter into reaction with dimethyl terephthalic acid in the presence of 1% NaOH in a ratio of 2 : 1 to 1.2 : 1 in nitrogen atmosphere with a slow increase (16 h) of temperature to 200°C. A mixture was prepared from the polyester (molecular weight 700-1500, hydroxyl number 400-80), the emulsifier OT-10 (OP-10), water, and triethyl amine, 30-50% 2,4-toluylene diisocyanate was added under vigorous stirring, and the mixture was then allowed to harden at 70-80°C in a thermostat. The weight by volume was controlled by the water addition:

Card 1/2

87433

Synthesis and Investigation of Foam Plastics
From Polyesters of Terephthalic Acid and
2,4-Toluylene Diisocyanate

S/191/60/000/010/005/017
B004/B060

g water per 100 g polyester	0.5	1.0	2.0	3.0	4.0	5.0
weight by volume of foam plastic, kg/m ³	183	113	72	60	57	52

The total volume of pores amounted to 91-97% of the sample volume. The maximum water adsorption (in compliance with ГОСТ 4650-49, GOST 4650-49) amounted to 20-30 g/dm³. The compressive strength was determined according to ГОСТ 4651-49 (GOST 4651-49), the bending strength according to ГОСТ 4648-56 (GOST 4648-56) (5.4 kg/cm² for 60 kg/m³ weight by volume), and the intrinsic resilience according to ГОСТ 4647-55 (GOST 4647-55). The heat resistance, determined according to Zhurkov, was 100-130°C. All foam plastics were hardly inflammable and were quickly extinguished after removal from the flame. Foam plastics with weight by volume 160-220 kg/m³ are usable in civil construction, aircraft and automobile building. The plastics with weight by volume 50-100 kg/m³ are suitable for heat insulation and as floating materials. There are 16 references: 2 Soviet, 5 US, 3 British, and 6 German.

Card 2/2

DATSKOVICH, L.A.; LIBEROVA, R.A.; LOSEV, I.P.; PLOTNIKOV, I.V.;
SVOYKINA, A.S.; TSVETKOVA, N.A.

Studying the effect of the primary polyatomic alcohols on the
properties of polyester urethane lacquers. Lakokras.mat.i ikh
prim. no.2:22-26 '62. (MIRA 15:5)

1. Moskovskiy ordena Lenina khimiko-tehnologicheskiy institut imeni
D.I.Mendeleyeva i Vsesoyuznyy nauchno-issledovatel'skiy institut
plenochnykh materialov i iskusstvennoy kozhi.
(Lacquers and lacquering--Testing)

ACCESSION NR: AT4033988

S/0000/63/000/000/0073/0075

AUTHOR: Datskevich, L. A.; Mayboroda, V. D.; Losev, I. P. (Deceased)

TITLE: Synthesis and analysis of polyester urethans containing phosphorus.
I. Reaction of phenylphosphoric acid dichloroanhydride with diethylene glycol

SOURCE: Geterotseptye vysokomolekulyarnye soyedineniya (Heterochain macromolecular compounds); sbornik statey. Moscow, Izd-vo "Nauka," 1963, 73-75

TOPIC TAGS: diethylene glycol, phenylphosphoric acid dichloroanhydride, polyester urethan, polycondensation, polycondensation kinetics, second order reaction, reaction rate temperature dependence, phosphorus containing polyester urethan, urethan

ABSTRACT: Equimolecular proportions of diethylene glycol and phenylphosphoric acid dichloroanhydride were polycondensed in solution to study the kinetics of the process at 40-80°C. Analysis of the results indicates a second order reaction up to conversion levels of 70%. The activation energy was calculated as 10.6 kcal/mol. The temperature had a significant effect on the reaction rate constant ($3.58 \cdot 10^{-4}$ and $22.3 \cdot 10^{-4} \text{ l} \cdot \text{mol}^{-1} \cdot \text{sec}^{-1}$ at 40 and 80, respectively), the temperature coefficient (1.73 and 1.45, respectively) and the rate of reaction (33 and 71%, respectively after 2 min.). The polyester obtained was a colorless, highly viscous liquid with molecular weight about 2000. Orig. art. has: 4 graphs, 1 table and Card 1/2

ACCESSION NR: AT4033988

3 formulas.

ASSOCIATION: Moskovskiy khimiko-tehnologicheskiy institut im. D. I. Mendeleyeva
(Moscow Institute of Chemical Technology)

SUBMITTED: 23Jun62

DATE ACQ: 30Apr64

ENCL: 00

SUB CODE: OC

NO REF Sov: 001

OTHER: 000

Card 2/2

ACCESSION NR: AT4034010

S/0000/63/000/000/0243/0245

AUTHOR: Datskevich, L.A.; Mayboroda, V.D.; Losev, I.P. (Deceased)

TITLE: Synthesis and investigation of phosphorus-containing polyesterurethans.
II. The reactivity of the dichloroanhydrides of substituted phenylphosphoric acids


SOURCE: Geterotsipnye vysokomolekulyarnye soyedineniya (Heterochain macromolecular compounds); sbornik statey. Moscow, Izd-vo "Nauka," 1963, 263-245

TOPIC TAGS: polymer, phosphorus containing polymer, urethan polymer, poly-esterurethan, phosphorus containing polyesterurethan, phenylphosphate, phenyl-phosphoric acid dichloroanhydride fireproof material

ABSTRACT: In a study of the reactivity of dichloroanhydride-substituted phenyl-phosphoric acids, the kinetics of the latter's interaction with diethylaneglycol was investigated at 50°C and the reaction rate constants for different substituted products were graphically determined. The following scheme is offered to represent the reaction mechanism:

Card 1/3

ACCESSION NO: AT4034010

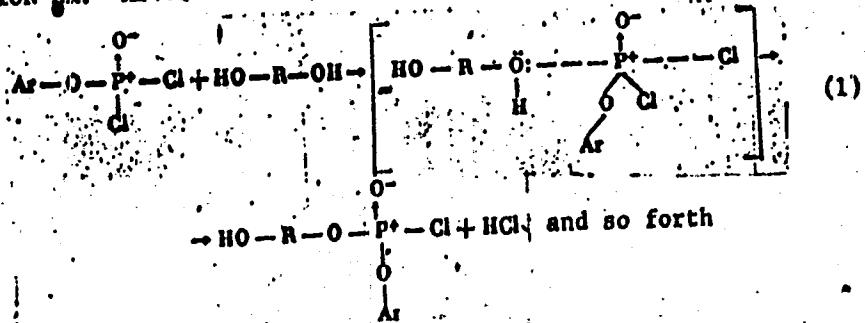

in which Ar stands for phenyl, p-chlorophenyl, p-bromophenyl, p-nitrophenyl, p-methylphenyl, m-methylphenyl and tertiary n-butylphenyl, involved in the study. Electropositive substitutes, present in the benzene ring of a dichloro-anhydride, were found to slow down the polycondensation reaction and to accelerate the electronegative reaction. Synthesis of fireproof film materials is believed to be feasible from P-containing polyesters and diisocyanates.

Card 2/3

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

ACCESSION NR: AT4034010

ASSOCIATION: Moskovskiy khimiko-tehnologicheskiy institut im. D. I. Mendeleyeva
(Moscow Chemical Technology Institute)

SUBMITTED: 26Apr63

DATE ACQ: 30Apr64

ENCL: 00

SUB CODE: OC, MT

NO REF Sov: 003

OTHER: 000

Card 3/3

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

ACCESSION NR: AP4043790

S/0190/64/006/008/1498/1500


AUTHOR: Datskevich, L. A., Mayboroda, V. D., Losev, I. R.

TITLE: Synthesis and investigation of phosphorus-containing polyesterurethanes. III

SOURCE: Vy'sokomolekulyarnye soyedineniya, v. 6, no. 8, 1964, 1498-1500

TOPIC TAGS: polyesterurethane, urethane, phosphorylated polymer, polymerization kinetics, phenylphosphoric acid, triethylene glycol, hexamethylene diisocyanate

ABSTRACT: Phosphorus-containing polyesterurethanes were synthesized from 1,6-hexamethylene diisocyanate and a polymer based on triethyleneglycol and the dichloroanhydride of phenylphosphoric acid, in the absence of a solvent, in order to expand the practical uses of a reaction whose mechanism is believed to follow the pathway:



Equimolar amounts of the cyanate and the polymer were reacted at 60, 70, 80, 90 and 100°C in a testtube provided with a mechanical mixer for a period of 3-6 hrs, during which time the isocyanate number and the refractivity were periodically determined to follow the dynamics

Card 1/2

L 2011-65 ENT(m)/EFF(c)/EPR/EMP(j)/T PC-4/Pr-4/Ps-4 RPL WH/RM
ACCESSION NR: A P4047221 S/0190/64/006/010/1907/1910

AUTHOR: Mayboroda, V. D.; Datskevich, L. A.

TITLE: Polycondensation of phenyl phosphorodichloride with diethylene glycol B/

SOURCE: Vyssokomolekulyarnyye soyadineniya, v. 6, 10, 1964,
1907-1910

TOPIC TAGS: polycondensation, polyester, phosphorus containing polyester, phenyl phosphorodichloride, diethylene glycol, polyurethan

ABSTRACT: Communication 4 of the series "Synthesis and investigation of phosphorus-containing polyester-urethans" reports a study of the polycondensation of phenyl phosphorodichloride with diethylene glycol in a 1/1 molar ratio in the melt at 40—80°C. A polyester, linear in structure and with little branching, was obtained, which reacts with 1,6-hexamethylene diisocyanate to form a polyurethan. The effect of polycondensation temperature and time on the degree of completion, polyester yield, intrinsic viscosity, and polyester refractive index was studied. The maximum degree of completion was

Card 1/2

L 18711-65

ACCESSION NR: AP4047221

96—98% at 60, 70, and 80°C and a 1-hr reaction time. The maximum polyester yield of 90—93% was attained at 40—50°C and a 5-hr reaction time. The observed increase in refractive index and intrinsic viscosity in the course of the polycondensation indicates a rise in the molecular weight of the polyester with reaction time. Despite the near completion of the polycondensation after 0.5—2 hr, further heating resulted in a molecular-weight increase, evidently due to the reaction of the macromolecules between themselves. Other possible side reactions resulting in a drop in polyester yield and molecular weight are discussed. Orig. art. has 2 figures and 7 formulas.

ASSOCIATION: Moskovskiy khimiko-tehnologicheskiy institut im. O. I. Mendeleyeva (Moscow Chemical Technology Institute).

SUBMITTED: 27 Dec 63

ATT. PRESS: 3122

ENCL: 00

SUB. CODE: OC, GC

NO. REV. Sov: 002

OTHER: 000

Card 2/2

DATSKENICH, M.F.; POTEKHIN, S.S.; ZIMIN, F.F.; POPOV, I.Ye.; RUSIN, P.N.;
ANOKHIN, S.D.; NESTEROV, V.F.; PROLOV, V.A.; GRYAZHOV, V.A., red.;
USTIYANTS, V.A.; KAPRALOVA, A.A., tekhn.red.

[Modernizing punched card calculating machines] Opyt modernizatsii
schetno-perforatsionnykh mashin. Moskva, Gos. stat. izd-vo, 1957.
(MIRA 11:4)
75 p.

1. Russia (1923- U.S.S.R.) Upravleniye "Soyuzmashchet."
(Punched card systems)
(Calculating machines)

DATSKOVICH, Mikhail Frantsovich; ZEMLYANSKIY, Aleksandr Sergeyevich;
KAGANOVICH, Abram Yul'yevich; MIKANOV, Timofey Mikhaylovich.
Prinimal uchastiye KHOMEKO, P.G.. IVANOV, M.I., red.; KOROTKOVA,
L., red.; TELEGINA, T., tekhn.red.

[Operation of accounting machines in State Bank enterprises]
Ekspluatatsiya sochetnykh mashin v uchrezhdeniakh Gosbanka.
Moskva, Gosfinisdat, 1959. 319 p. (MIRA 13:3)
(Accounting machines)

ALIYEV, G.A. (Moskva); BUSLENKO, N.P. (Moskva); KLIMOV, G.P. (Moskva); NAZARENKO, A.I. (Moskva); Prinimali uchastiye: POLYAKOVA, N.A.; DATSKEVICH, R.T.; GAYDABUKA, L.A.

Modeling of the operation of an automated furnace machine for welding pipes. Probl. kib. no.9:211-240 '63. (MIRA 17:10)

1. Elektrostal'skiy zavod tyazhelogo mashinostroyeniya (for Polyakova, Datskevich, Gaydabuka).

GAVRIN, V.F.; DATSKEVICH, V.A.

*Ecology of the shrike Lanius cristatus collaris L. in the
Byaloveshska Pushcha [with summary in English]. Zool. zhur. 37
no.7:1082-1090 Jl '58.* (MIRA 11:9)

*1. Gosudarstvennyy zapovednik "Beloveshskaya pushcha."
(Byaloveshska Pushcha—Shrikes)*

DATSKYEVICH, V.

Foot switch or headlights of the "Moskvich-407" car. Za rul. 18
no. 9:26 S'60. (MIRA 13:10)
(Automobiles--Lighting)

DATSKEVICH, V.

Pay parking lots for every city district. Za rul. 19 no. 2:32
F '61. (MIRA 14:4)
(Automobile parking)

S/117/60/000/012/015/022
A004/A001

AUTHORS: Malinina, N., Molodkina, M., Datskiy, M., Filippov, G.

TITLE: Cement Models for the Manufacture of Dies

PERIODICAL: Mashinostroitel', 1960, No. 12, p. 36

TEXT: Generally the complex profile of the working surface of forging dies for blades is machined on copying milling machines according to wooden model templets. These models lose their geometrical shape rather quick because of temperature fluctuations and the effects of air moisture in the storing rooms. Instead of having model sets for forging dies made of wood, the manufacture of which takes a model maker of the 6th grade some seven days, the Leningradskiy metallicheskij zavod (Leningrad Metallicheskij Plant) produces these models from cement. The templets used for the cement-model making serve also for the checking of the die shape during the milling operation and fitting work. At the beginning a frame work is manufactured from templets, distance sleeves and gaging pins. Braces are mounted on the sides of the framework, tightened by wedges and cramps. Then diluted construction gypsum is filled into the framework, the side walls of which are removed after the solidification of the gypsum. The profile of the die

Card 1/2

S/117/60/000/012/015/022

A004/A001

Cement Models for the Manufacture of Dies

model is then shaped subsequently between every pair of neighboring templets, the surplus gypsum being cut away flush with the templet profile. Those parts of the profile for which the framework does not provide a templet is done by surface gaging. The ready gypsum mold is covered with a thin nitro-lacquer coating and greased with stearin diluted with kerosene in order to prevent the gypsum from sticking to the cement. Side walls are mounted to the ready mold and the cement is poured in. The process of the cement model setting takes 3-4 days. The cast cement model-templet has a smoother and better surface than the wooden ones, while its manufacture costs by 2-2.5 times less than that of wooden model-templets. There are 4 figures.

Card 2/2

L 23557-66 EWT(d)/EWT(1) IJP(c)

ACC NR: AP6002946

(A)

SOURCE CODE: UR/0286/65/000/024/0107/0107

AUTHOR: Datskovskiy, V. M.

ORG: none

TITLE: Hydraulic integrator for solving systems of three differential equations with partial derivatives. Class 42, No. 177176

SOURCE: Byulleten' izobretений i tovarnykh znakov, no. 24, 1965, 107

TOPIC TAGS: hydraulic logic device, heat equation

ABSTRACT: This Author Certificate presents a hydraulic integrator for solving systems of three differential equations with partial derivatives, e.g., equations describing the nonstationary heat exchange between a gas and a layer of friable material blowing through this gas (taking into account the thermal conductivity of its parts). The integrator contains piezometric integrators. To reduce the number of experiments required to solve the problem and for the unique arrangement of the surfaces of piezometers, hydraulic resistances, and initial and boundary conditions, the integrator contains a group of coupled capillaries and piezometer stopcocks. Each of the groups of piezometers interlocked by one lever is connected through stopcocks to piezometers modulating the time segments.

SUB CODE: 13, 20/ SUB4 DATE: 24Jun63

UDK: 681.141--522

Card 1/1

S/799/62/000/002/003/011

AUTHORS: Barilovskiy, V. L., Vagner, E. N., Glukhov, Yu. N., Datsko, A. V.
Stupin, E. F.

TITLE: Potential static trigger having a current key with back coupling through
logical diode networks.

SOURCE: Akademiya nauk SSSR. Institut elektronnykh upravlyayushchikh mashin.
Tsifrovaya tekhnika i vychislitel'nyye ustroystva. no. 2. 1962, 36-43.

TEXT: The paper presents a potential static trigger network utilizing a current
key which serves for the making of systems of elements that are fairly fast-acting
and are free, to a significant extent, of the shortcomings of other current-switching
schemes which require the use of a large number of semiconductor triodes which
must be fairly uniform in some of their parameters, such as the voltage between the
emitter and the base of the open triode, the base current of the closed triode, and
must have fairly elevated values of the current-amplification coefficient, also the
unavoidable limitations to the scatter in the values of the resistances and of the sta-
bility of the power supply. A circuit diagram of the trigger is shown. The outstand-
ing characteristic of this current key (Author's Certificate no. 130240, entitled
"Shaper-inverter") consists in the fact that the collector circuits of its triodes in-
clude fairly high ohmic resistors and diodes which on the collectors of the triodes

Card 1/2

Potential static trigger having a current key

S/799/62/000/002/003/011

of the key affords fixed voltage drops of the order of 5-10 v, which are then amplified by the emitter-repeaters, which employ triodes. These magnitudes of the voltage differences at the trigger output permit one to employ logical diode networks in the construction of computers, an arrangement which reduces significantly the number of transistors employed. A circuit diagram of a logical diode scheme is shown. The frequency characteristics of the network and the design problems of a system of elements are discussed, and the basic requirements for the portions and design elements of the circuitry are set forth. The potential static trigger described in the paper is fairly fast-operating. All of the triodes of the trigger operate in a nonsaturated regime. The fairly large voltage differences afforded by the current key permit the use of the trigger in conjunction with diode circuits. The starting of the trigger and the feedback in it are performed through logical diode networks. There are no reactive elements, since all connections are by DC. A large scatter in the parameters of the transistors and diodes is permissible. The requirements relative to the resistances and the stability of the power supply become more stringent as a result thereof. However, they are readily fulfilled. There are 2 figures and 9 references (8 Russian-language Soviet and 1 English-language: R. K. Richards, Arithmetical operational on digital computing machines, in Russian-language translation, Moscow. Foreign Literature Publishing House, 1957).

Card 2/2

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSKO, G.M.

Seasonal changes in physiomechanical properties of surficial strata,
Biul. MOIP, Otd. geol. 35 no. 2:159-161 Mr-Ap '60. (MIRA 14:4)
(Soil mechanics)

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

DATSKO, G.M.

Seasonal changes of the modulus of soil and ground deformation
in the forest zone of the European part of the U.S.S.R. Vest.-
Mosk.un.Ser.4:Geol. 17 no.4:62-67 Jl-Ag '62. (MIRA 15:9)

1. Kafedra gruntovedeniya i inzhenernoy geologii Moskovskogo
gosudarstvennogo universiteta.
(Soil mechanics)

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

DATSKO, N.Y.

Method of erecting oil field frame and pile installations at great
ocean depths using turbodrills. Trudy Azerb.ind.inst.no.9:98-106
'55. (Oil well drilling, Submarine) (MLRA 9:10)

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

15-57-8-11689

Translation from: Referativnyy zhurnal, Geologiya, 1957, Nr 8,
p 240 (USSR)

AUTHOR: Datsko, N. F.

TITLE: Description and Erection of Off-Shore Drill-Rig
Platform for Sea Depth of 20 Meters (Neftepromyslovaya
estakada dlya glubiny morya 20 m i sposob yeye vozve-
deniya)

PERIODICAL: Tr. Azerb. industr. in-ta, 1956, Nr 13, pp 89-102

ABSTRACT: The DEA drill-rig platform was designed by N. F.
Datsko, G. G. Yelesuiskiy, and N. M. Aliyevyy, members
of the Department of Strength of Materials and
Structural Mechanics of the Azerbaiidzhhan SSR Industrial
Institute. It is usable for any type of relief and for
any lithology of the sea bottom. The use of tubular
piles equipped with turbine drills makes it possible to
sink the piles in the bottom rapidly to any necessary

Card 1/3

15-57-8-11689

- Description and Erection of Off-Shore Drill-Rig (Cont.)

The fabricated supports and the trusses are mounted with a special crane which is set up on the fabricated truss of the platform. The crane is dismantled after the work is completed and may be transferred to another location.

Card 3/3

K. G. Volodchenko

DATSKO, N.F.

Elevated steel deck with broad supports for operations in deep sea oil fields. Inv. vys. ucheb. zav.; neft' i gaz no.6:109-115 '58.
(MIRA 11:9)

1. Azerbaydzhanskiy industrial'nyy institut im. M. Azizbekova.
(Oil well drilling, Submarine--Equipment and supplies)

VLADZIMIRSKAYA, Ye.V. [Vladzimirs'ka, O.V.]; DATSKO, N.N. [Datsko, N.M.]

Arylides of carbamylthioglycolic acid as reagents for chemical analysis. Farmatsev. zhur. 19 no.4:38-42 '64. (MIRA 17:11)

1. Kafedra farmatsevticheskoy khimii L'vovskogo meditsinskogo instituta (zaveduyushchiy kafedroy prof. M.M. Turkevich).

SOV/126-6-5-21/43

AUTHORS: Datsko, O. I., and Pavlov, V. A.

TITLE: Temperature Dependence of the Internal Friction in Pure Nickel (Temperaturnaya zavisimost' vnutrennego treniya chistogo nikelya)

PERIODICAL: Fizika Metallov i Metallovedeniye, 1958, Vol 6, Nr 5, pp 900-904 (USSR)

ABSTRACT: The authors used electrolytic nickel of 99.987% purity. Ingots of nickel were rolled and drawn at room temperature in several stages until a wire of 0.80 mm dia. was produced. In between the forming stages the samples were annealed at 800°C in vacuo. After the last anneal the wire was deformed by 80% reduction of its cross section and cut into 300 cm lengths. The temperature dependence of the internal friction was determined by means of a torsional pendulum oscillating at 0.5 c/s in 10^{-3} - 10^{-4} mm Hg vacuum. The following procedure was applied in each set of measurements: a sample was heated at 2°C/min to 700-900°C and then cooled slowly to room temperature by switching off the furnace and leaving the sample in it. After each such anneal the temperature dependence of the internal friction was measured and recorded. In the first

SOV/126-6-5-21/43

Temperature Dependence of the Internal Friction in Pure Nickel

heating of a deformed sample to 700°C or more, recrystallisation occurred at 400°C . Each subsequent heating produced collective recrystallisation. Fig.1 shows the temperature dependence of the internal friction of nickel as a function of the anneal temperature.

Curves 1-5 in Fig.1 represent the results obtained by short anneals at 700 , 750 , 800 , 850 and 900°C respectively, while curve 6 is the result of a 3-hour anneal at 900°C .

Fig.2 gives the temperature dependence of the internal friction of nickel as a function of deformation by 1% (curve 1) and subsequent short anneals at 700°C (curve 2), 800°C (curve 3), 900°C (curve 4), and a 3-hour anneal at 900°C (curve 5). Fig.3 presents data, analogous to those of Fig.2 for 2% deformation (curve 2) and subsequent anneals at 900°C (short anneal, curve 3 and 3-hour, curve 1). Fig.4 shows the effect of addition of 0.023% (curve 1), 0.05% (curve 2) and 0.24% (curve 3) of aluminium on the temperature dependence of the internal friction of nickel.

The authors make the following conclusions.

1. The internal friction peak at $440\text{-}460^{\circ}\text{C}$ is due to

Card2/4

SOV/126-6-5-21/43

Temperature Dependence of the Internal Friction in Pure Nickel

relaxation stresses along grain boundaries. This peak decreases in amplitude and is slightly displaced towards higher temperatures on increase of the annealing temperature. This is due to the increase of the grain size and the change in properties of the grain boundaries on collective recrystallisation.

2. The internal friction peak at 630-800°C is due to relaxation of stresses on mosaic block boundaries. It increases in amplitude and is displaced towards lower temperatures by plastic deformation. Increase of the temperature of anneals carried out after deformation displaces this peak towards higher temperatures and reduces its amplitude. This behaviour is due to processes of growth and reduction in size of the mosaic blocks, which are accompanied by changes in the properties of the block boundaries. The 630-800°C peak disappears when a foreign metal (e.g. aluminium) is added to nickel (Fig.4).

There are 5 figures and 14 references, 4 of which are Soviet, 6 English, 2 German, 1 French and 1 translation from English.

Card 3/4

SOV/126-6-5-21/43

Temperature Dependence of the Internal Friction in Pure Nickel

ASSOCIATION: Institut fiziki metallov Ural'skogo filiala AN SSSR
(Institute of Metal Physics, Ural Branch of the Ac.Sc.,
USSR)

SUBMITTED: August 8, 1957

Card 4/4

DATSKO, O.I.

18(7) PHASE I BOOK EXPLOITATION SOV/3355

Akademiya nauk SSSR. Institut metallurgii. Nauchnyy sovet po problemam sharoprostrochnykh splavov

Issledovaniya po sharoprostrochnym splavam, t. IV (Studies on Heat-Resistant Alloys, vol. 4), Moscow, Izd-vo AN SSSR, 1959. 400 p. Errata slip inserted. 2,200 copies printed.

Ed. of Publishing House: V. A. Klimov; Tech. Ed.: A. P. Guseva; Editorial Board: I. P. Bardin, Academician; G. V. Kurdyumov, Academician; N. V. Ageyev; Corresponding Member, USSR Academy of Sciences; I. A. Odintsov, I. M. Pavlov, and I. P. Zudin, Candidate of Technical Sciences.

PURPOSE: This book is intended for metallurgists concerned with the structural metallurgy of alloys.

COVERAGE: This is a collection of specialized studies of various problems in the structural metallurgy of heat-resistant alloys. Some are concerned with theoretical principles, some with descriptions of new equipment and methods, others with properties of specific materials. Various phenomena occurring under specified conditions are studied and reported on. For details, see Table of Contents. The articles are accompanied by a number of references, both Soviet and non-Soviet.

TABLE OF CONTENTS:

Oding, I. A., V. S. Ivanova, and Yu. P. Liberov. Role of the Surface of Separation in Creep-rupture Failure of Metals	3
Davidenkov, N. N. On One Contradiction in the Theory of Cold Shortness	13
Osipov, N. A. On the Diffusion and Heat Resistance of Metal Phases	21
Pavlov, V. A., N. G. Gaydukov, O. I. Datsko, M. I. Moskova, and I. M. Kamalinskaya. Effect of Structural Peculiarities on the Behavior of Metals at High Temperatures	26

Card 2/12

"APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2

PAVLOV, V.A.; GAYDUKOV, M.G.; DATSKO, O.I.; MOSKOVA, N.I.; PERETURINA,
I.A.

Effect of structural characteristics on metal behavior at
high temperatures. Issl.po sharopr.splav. 4:26-35 '59.

(MIRA 13:5)

(Nickel-copper alloys--Metallography)

APPROVED FOR RELEASE: 08/25/2000

CIA-RDP86-00513R000509730005-2"

S/520/59/000/022/017/021
E193/E483

AUTHOR: Datsko, O.I.

TITLE: Change of the Properties of the Grain Boundaries of Nickel Brought About by Alloying With Copper

PERIODICAL: Akademiya nauk SSSR. Ural'skiy filial, Sverdlovsk.
Institut fiziki metallov. Trudy, No.22,1959,pp.117-121

TEXT: The object of the investigation described in the present paper was to study the causes and the mechanism of the slowing down of the relaxation processes, associated with the properties of grain boundaries, in pure nickel and in Ni-Cu alloys. To this end, the temperature-dependence of internal friction and natural frequency of vibrations of the alloys studied was determined by the torsional pendulum method and the recrystallization temperature of these metals was measured. The experimental alloys (pure nickel and alloys containing 10, 20 and 40 wt.% Cu) were prepared by vacuum-melting from electrolytic nickel and copper, preliminarily degassed by vacuum annealing. The wire specimens (300 mm long, 0.8 mm in diameter) were prepared by rolling and drawing, the final cold-drawing stage having been carried out to give a total reduction of area of 80%. The experiments were carried out in Card 1/7.

Change of the Properties of ...

S/520/59/000/022/017/021
E193/E483

the following manner: the cold-worked specimen was heated at the rate of 2°C/min to the annealing temperature and maintained at that temperature for a pre-determined time. The specimen was then furnace-cooled to room temperature, after which it was heated again to the annealing temperature. During both the first and second heating cycle, the temperature dependence of the natural frequency of vibration and of internal friction (η^{-1}) was determined. In the case of annealed material (second heating cycle) care was taken to carry out the measurements on specimens with the same thermal and mechanical history and the same grain size, in order to exclude the possibility of the results being affected by the variation of these factors. To determine the temperature of the beginning of recrystallization, several cold-worked specimens of an alloy were heated to various temperatures, after which they were electrolytically polished in a 57:37:7 glycerine:orthophosphoric acid:water electrolyte, etched lightly in a 1:1 nitric acid:acetic acid mixture and examined under microscope. The temperature of the treatment, after which the entire surface of the specimen was occupied by newly-formed grains, was regarded as the recrystallization temperature of a given alloy.

Card 2/7

Change of the Properties of ...

S/520/59/000/022/017/021
E193/E483

The main results are reproduced in Fig.1, where internal friction (η -1) of specimens annealed for 3 h at 900°C is plotted against the test temperature (°C), curves 1 to 5 relating to: 1 - pure nickel (grain size $a \approx 0.2$ mm); 2 - 10% Cu-Ni alloy ($a \approx 0.04$ mm); 3 - 20% Cu-Ni alloy; 4 - 40% Cu-Ni alloy; 5 - 10% Cu-Ni alloy extended to 3% elongation and subsequently annealed for 3 h at 1050°C ($a \approx 0.15$ mm). It will be seen that whereas pure nickel has two internal friction peaks at 420 to 440 and 700 to 760°C, the internal friction of Ni-Cu alloys, very low at temperatures below 500°C, increases rapidly and monotonically at higher temperatures, reaching a maximum in the 740 to 900°C temperature range. In Fig.2, the square of the natural frequency of vibrations (f^2) of cold-worked Ni, 10% Cu-Ni, 20% Cu-Ni and 40% Cu-Ni alloy specimens (Curves 1 to 4 respectively) is plotted against the test temperature (°C). It will be seen that all curves relating to alloys are below that constructed for pure nickel and that, with increasing temperature, f^2 decreases (the rate of decrease being highest in nickel), the curves relating to alloys being parallel at low temperatures and starting to converge at about 500°C. The recrystallization temperature was found to be Card 3/7

Change of the Properties of ...

S/520/59/000/022/017/021
E193/E483

380 \pm 15°C for pure nickel and 585 \pm 15°C for the Ni-Cu alloys, irrespective of their Cu content. Recent results of the author and V.A.Pavlov (Ref.5) are quoted; they have found that the internal friction peak, observed in nickel in the 420 to 440°C range, disappears if the size of the individual grains exceeds the diameter of the specimen, from which they inferred that this peak is associated with the relaxation of stresses along the grain boundaries. Since the magnitude of the internal friction peak, observed in the 10% Cu-Ni alloy with somewhat large grains (Curve 5, Fig.1) was lower than that displayed by the finely-crystalline material (Curves 2 to 4, Fig.1), it is most likely that the internal friction peaks on curves 2, 3, 4 and 5 are also associated with the relaxation processes at the grain boundaries. The results of the present investigation indicate that the temperature of both recrystallization and relaxation processes, which take place at nickel grain boundaries, is raised by copper additions. This change cannot be attributed to the variation of the atomic bond forces, since these, as is illustrated by curves shown in Fig.2, decrease with increasing Cu content. It would appear that the introduction of copper brings about changes in the

Card 4/7